


# 電梯鐵軌規格表

## Dimensions and Tolerances of Machined guide rails

Designation	Dimensions in millimetres																		
	$b_1$	$h_1$	$k$	$n$	$c$	$f$	$g$	$r_s$	$m_1$	$m_2$	$u_1$	$u_2$	$d$	$d_1$	$b_3$	$l_{2g}$	$l_{3g}$	$l$	$h$
T78/B or BE	78	56	10	26	7	8.5	6	2.5	3.02	2.98	3.6	2.9	14	28	50	114	38	165	55
T89/B or BE	89	62	15.88	33.4	10	11.1	7.9	3	6.4	6.37	7.14	6.35	13	26	57.2	114.3	38.1	156	61
T114/B or BE	114	89	16	38	10	12	8	4	6.4	6.37	7.14	6.35	17	33	74	114.3	38.1	156	88
T127-2/B or BE	127	88.9	15.88	50.8	10	15.9	12.7	5	6.4	6.37	7.14	6.35	17	33	74	114.3	38.1	156	88
T140-1/B or BE	140	108	19	50.8	12.7	15.9	12.7	5	6.4	6.37	7.14	6.35	21	40	92.1	152.4	31.8	193	107
T140-2/B or BE	140	102	28.6	50.8	17.5	17.5	14.5	5	6.4	6.37	7.14	6.35	21	40	92.1	152.4	31.8	193	101
T140-3/B or BE	140	127	31.75	57.2	19	25.4	17.5	5	6.4	6.37	7.14	6.35	21	40	92.1	152.4	31.8	193	126
Tolerances Class:/B	$\pm 1.5$	$\pm 0.75$	$+0.1$ 0	$+3$ 0	—	$\pm 0.75$	$\pm 0.75$	—	$+0.06$ 0	0 $-0.06$	$\pm 0.1$	$\pm 0.1$	—	—	$\pm 0.2$	$\pm 0.2$	$\pm 0.2$	$+3$ 0	$\pm 0.1$
Tolerances Class:/BE	$\pm 1.5$	$\pm 0.75$	$+0.05$ 0	$+3$ 0	—	$\pm 0.75$	$\pm 0.75$	—	$+0.03$ 0	0 $-0.03$	$\pm 0.1$	$\pm 0.1$	—	—	$\pm 0.2$	$\pm 0.2$	$\pm 0.2$	$+3$ 0	$\pm 0.05$

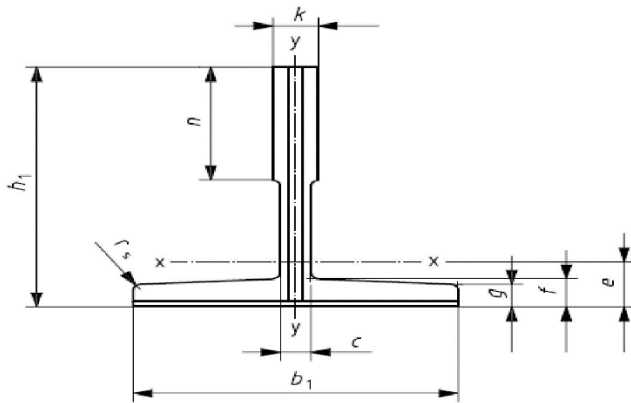

## Dimensions and Tolerances of Fishplate

Designation	Dimensions in millimetres						
	$d$	$l_1$	$l_{2f}$	$l_{3f}$	$b_2$	$b_3$	$v$
T78/B or BE	14	270	114	38	75	50	13
T89/B or BE	13	305	114.3	38.1	90	57.2	16
T114/B or BE	17	305	114.3	38.1	114	74	20
T127-2/B or BE	17	305	114.3	38.1	127	74	22
T140-1/B or BE	21	380	152.4	31.8	140	92.1	28
T140-2/B or BE	21	380	152.4	31.8	140	92.1	38
T140-3/B or BE	21	380	152.4	31.8	140	92.1	38
Tolerances	—	$\pm 3$	$\pm 0.2$	$\pm 0.2$	$\pm 3$	$\pm 0.2$	$\pm 2$

NOTE: Dimension of  $v$  and  $l_1$  could be changed according to customers' requirements

